

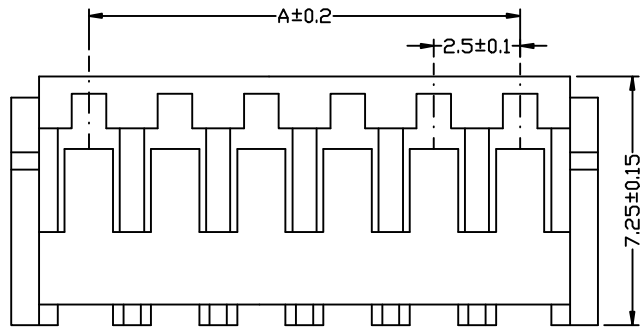
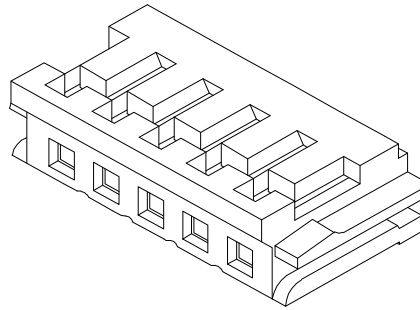


环保物料

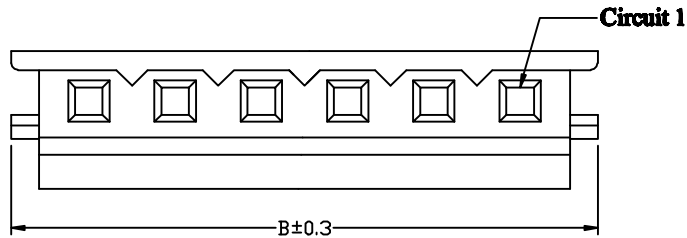

■ Specifications(规格) :

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 3A AC / DC
- Withstanding voltage(耐压值): 800V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤10mΩ
- After environmental testing(环境测试后): ≤20mΩ

■ Housing(胶壳)





- Part No. (料号) : J2501H-XXP
- Poles (PIN数) : 02-15
- Material (材质) : Nylon 66 (尼龙66) UL 94V-0
- Suitable HLB J2501T series Terminal(匹配J2501T系列端子)
- Mates with HLB J2501W series Wafer (匹配J2501W系列针座)
- Q' ty (数量) : 1,000Pcs/Bag/每袋 (1, 000Pcs)

Poles	Part No	Dimensions (mm)	
		A	B
2	J2501H-02P	2.50	7.00
3	J2501H-03P	5.00	9.50
4	J2501H-04P	7.50	12.00
5	J2501H-05P	10.00	14.50
6	J2501H-06P	12.50	17.00
7	J2501H-07P	15.00	19.50
8	J2501H-08P	17.50	22.00
9	J2501H-09P	20.00	24.50
10	J2501H-10P	22.50	27.00
11	J2501H-11P	25.00	29.50
12	J2501H-12P	27.50	32.00
13	J2501H-13P	30.00	34.50
14	J2501H-14P	32.50	37.00
15	J2501H-15P	35.00	39.50


					<p>一般公差 GENERAL TOLERANCE</p> <p>.X ±0.3</p> <p>.XX ±0.2</p> <p>.XXX ±0.1</p>				<p>东莞市翰皓精密电子有限公司 Dongguan Han Hao Precision Electronics Co.,Ltd</p>				<p>料号 PART NO J2501H-XXP</p>			
<p>2011/05/14 A B 修改图框格式</p>					<p>核准 APPD 审核 CHK 绘图 DR 日期 DATA</p>				<p>品名 TITLE 2.50 mm Crimp Style connectors</p>							
<p>日期 DATE</p>		<p>旧版次 OLD REV</p>	<p>新版次 NEW REV</p>	<p>变更内容 DESCRIPTION</p>		<p>审核 CHK</p>	<p>核准 APPD</p>	<p>角注 PROJECT</p>		<p>SUCCESS 刘艳</p>		<p>2007/05/03</p>	<p>单位 UNIT MM</p>	<p>比例 SCALE 1/1</p>	<p>图号 NUMBER A-106</p>	<p>版次 REV B</p>

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8


F
E
D
C
B
A

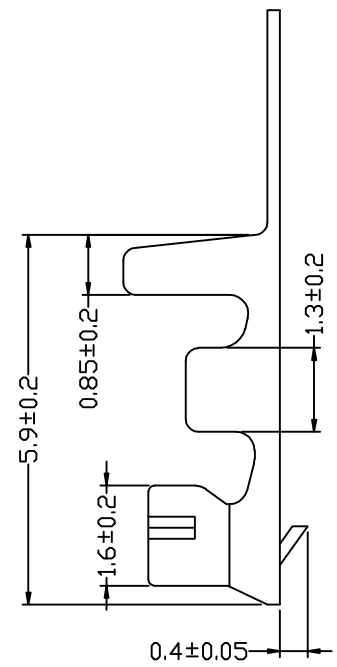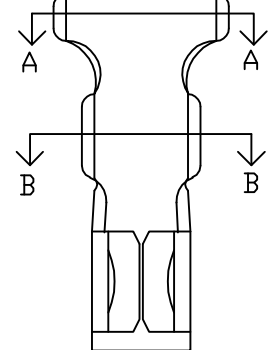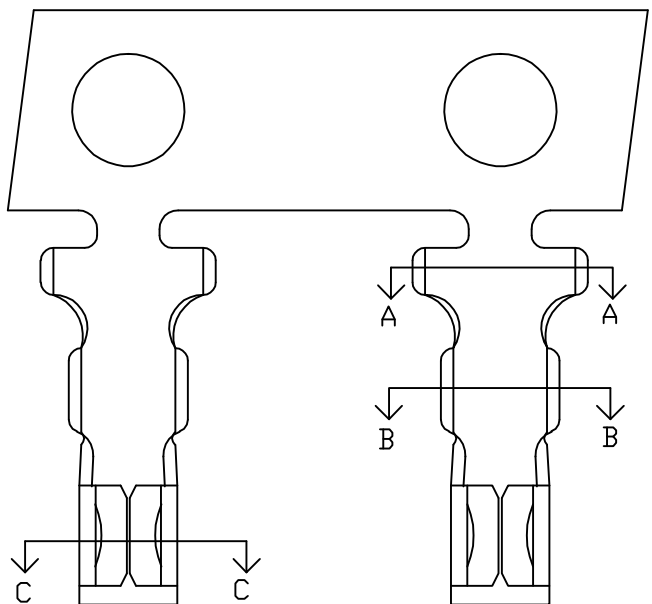

A-A SEC



B-B SEC



C-C SEC

SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1000MΩmin.
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 10mΩmax.

TERMINAL

- Part No.: J2501T
- Applicable wires: AWG#22-30
- Material: Phos. Bronze
- Finish: Tin plated
- Thickness: 0.2mm
- Used in HLB J2501 series Housing
- Q'ty:10000pcs/reel

							GENERAL TOLERANCE X ±0.30 XX ±0.20 XXX ±0.10				东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				PART NO. J2510T			
											TITLE 2.5 mm Crimp Style Connectors							
2011/05/22	A	B		Modify frame format	Jova	Jova Lau	APPROVAL	CHECK	DRAWN	DATA								
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	Smark	Yu wei	Liu Yan	2011/05/22	UNIT	SCALE	NUMBER	REV				
1											mm	1:1	8	B				

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8