
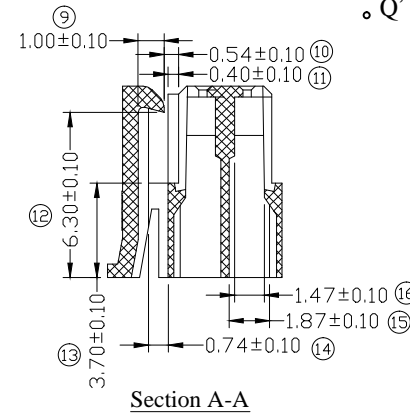

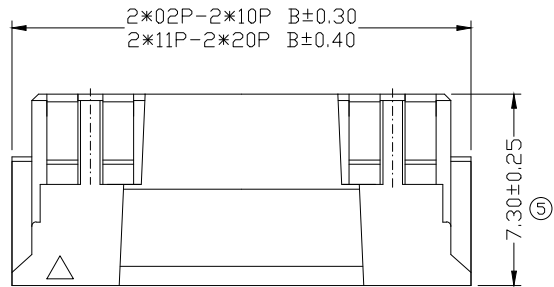
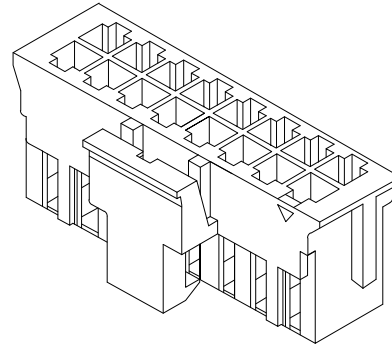


环保物料

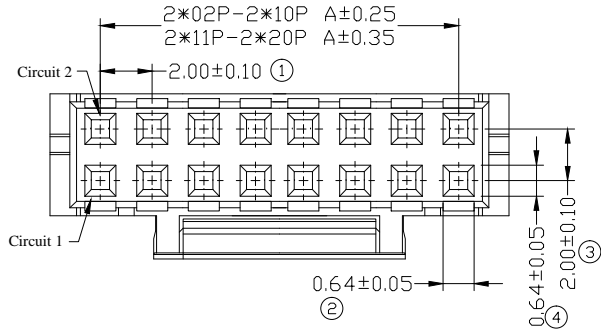

Specifications(规格):




- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 3A AC / DC
- Withstanding voltage(耐压值): 800V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤10mΩ
- After environmental testing(环境测试后): ≤20mΩ

Housing(胶壳)


- Part No. (料号): J2002HA-2\*XXP
- Poles (PIN数): 4-44
- Material (材质): Nylon 66 (尼龙66) UL 94V-0
- Mates With HHB J2002WRA J2002WA Series Dual Row WAFER
- Q' ty (数量): 1,000Pcs/Bag/每袋 (1,000Pcs)

Poles	Part No.	Dimension(mm)		Poles	Part No.	Dimension(mm)	
		A	B			A	B
04	J2002HA-2*2P	2.00	5.90	26	J2002HA-2*13P	24.00	27.90
06	J2002HA-2*3P	4.00	7.90	28	J2002HA-2*14P	26.00	29.90
08	J2002HA-2*4P	6.00	9.90	30	J2002HA-2*15P	28.00	31.90
10	J2002HA-2*5P	8.00	11.90	32	J2002HA-2*16P	30.00	33.90
12	J2002HA-2*6P	10.00	13.90	34	J2002HA-2*17P	32.00	35.90
14	J2002HA-2*7P	12.00	15.90	36	J2002HA-2*18P	34.00	37.90
16	J2002HA-2*8P	14.00	17.90	38	J2002HA-2*19P	36.00	39.90
18	J2002HA-2*9P	16.00	19.90	40	J2002HA-2*20P	38.00	41.90
20	J2002HA-2*10P	18.00	21.90	42	J2002HA-2*21P	40.00	43.90
22	J2002HA-2*11P	20.00	23.90	44	J2002HA-2*22P	42.00	45.90
24	J2002HA-2*12P	22.00	25.90				

				一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1				东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				料号 PART NO J2002HA-2*XXP			
2011/05/14				修改图框格式				核准 APPD				品名 TITLE 2.0 mm Crimp Style connectors			
日期 DATE				变更内容 DESCRIPTION				审核 APPD				单位 UNIT MM			
旧版次 OLD REV				新版次 NEW REV				审核 CHK				比例 SCALE 1/1			
				角法 PROJECT				日期 DATA 2007/05/03				图号 NUMBER A-106			
				核准 APPD				SUCCESS				版次 REV B			

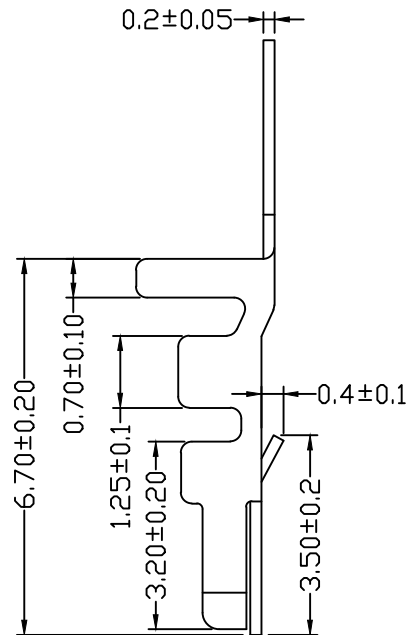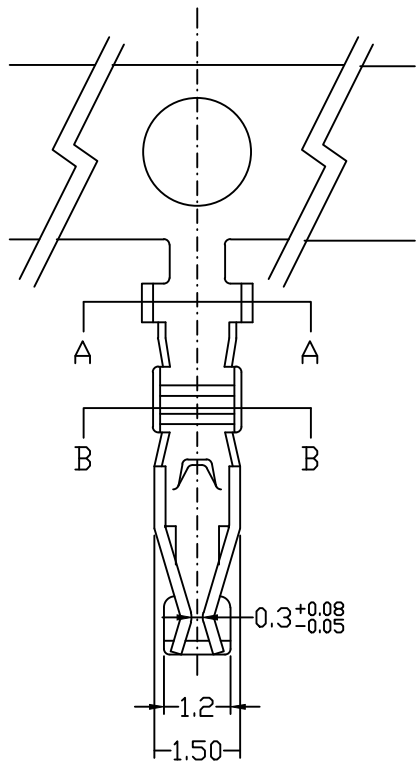

Section: A-A



Section: B-B

■ SPECIFICATIONS

- Voltage rating : 250V AC, DC
- Current rating : 3A AC,DC
- Withstanding voltage : 800V AC/minute
- Insulation resistance : 100M Ω min.
- Temperature range : - 25 to + 85
- (Including temperature rise in applying electrical current)
- Contact resistance : Initial value/10MΩ max. after environmental testing/20MΩ max.

■ TERMINAL

- Part No. : J2002T
- Applicable wires : AWG# 22 - 28
- Material : Phosphor Bronze
- Finish : Tin plated
- Thickness : 0.2mm
- Used in J2002H series Housing
- Q'ty : 10,000 pcs/reel

							GENERAL TOLERANCE X ±0.30 .XX ±0.20 .XXX ±0.10				东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				PART NO. J2002T															
							APPROVAL Smark				CHECK Yu wei				DRAWN Liu Yan				DATA 2011/05/22											
							PROJECT 				TITLE 2.0 mm Crimp Style Connectors				UNIT mm				SCALE 1:				NUMBER				REV B			
2011/05/22	A	B		Modify frame format	Jova	Jova Lau																								
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL																								